

POD SAFE

POD SAFE provides its users with a meeting space divided by glass into two safe areas. Both of these separate safe areas have an independent ventilation system to create a healthy air space for the user. POD SAFE is equipped with a motion detector and a control unit that automatically starts the ventilation and lighting when you walk into the POD room. When the space is not in use, the control unit shuts down the ventilation and power.

TECHNICAL INFORMATION

Three electrical sockets + data outlet included on both safe areas.
 POD electricity connection from the ceiling or floor.
 The length of the electric cord is 3 m.
 Automated electric ventilation with speed mode, lights with electronic motion sensor, and separate electronic control unit on the wall.
 Glass window includes the INTO stripe window taping.
 Installation wheels included.

MATERIAL DESCRIPTION

Melamine or veneered frame.
 Painted MDF door and door side panels.
 Door handle with satin-finished stainless steel.
 Laminated acoustic safety glass windows 10 mm.
 Acoustic panel on the ceiling.
 Floor and side walls coated with carpet.


POD surface options:	White NCS S 0500-N Dark grey NCS S 7500-N Pine American Oak Black Oak
POD inside color:	White NCS S 0500-N
Carpet options:	Fletco Ex-dono quartet
Ceiling acoustic panel:	GABRIEL - Soul
Door color options:	White smooth NCS S 0500-N American Oak Clear glass 10 mm

MEASUREMENTS

W1700 x D3400 x H2220 mm
 Door 9 x 21

POD SAFE LEFT


POD SAFE RIGHT

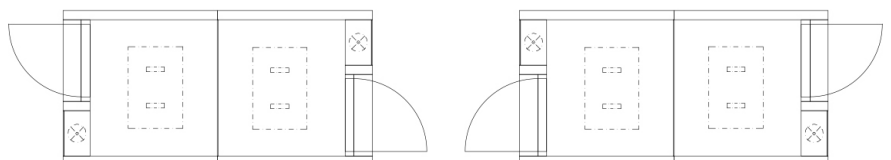

SURFACE FINISHES FOR POD ROOMS

STANDARD PRICE, CATEGORY 1

Melamine color options



NCS S 0500-N



NCS S 7500-N

PRICE CATEGORY 2

Veneer material options



Pine



American oak



Black oak


SURFACE FINISHES FOR DOOR & DOOR SIDE PANELS

STANDARD PRICE, CATEGORY 1



NCS S 0500-N

PRICE CATEGORY 2



American oak



Clear glass 10 mm

comes with white door panels

CARPETS FOR POD ROOMS: EX-DONO QUARTET FROM FLETCO | STANDARD PRICE, CATEGORY 1

Composition: Polyester non woven
Static electrical propensity: Antistatic
Impact sound reduction: 25 dB
Classification for use: Commercial / heavy use
Fire resistant: Yes



393300





393340



393350

Ask for more colors: sales@intoconcept.com



CEILING ACOUSTIC PANEL FABRIC: SOUL FROM GABRIEL | STANDARD PRICE, CATEGORY 1


Composition: 100% wool
Lightfastness: 5-7
Rubbing fastness: 4/wet, 4-5/dry
Sustainability: Complies with STANDARD 100 by OEKO-TEX
Meet Möbelfakta requirements
Cleaning: regular vacuum cleaning
Fire resistant: Yes (S 476 Part 7, class 1 ÖNORM B 3825-B1-3800-Q1 UK)




66104



67039



68131




64086



62059



61196



60182

